


RL32011WB-L Single-Ended Beam, NTEP 1:5000 Class III, Multiple Cell, Stainless Steel, IP67


Picture is a representation of actual product

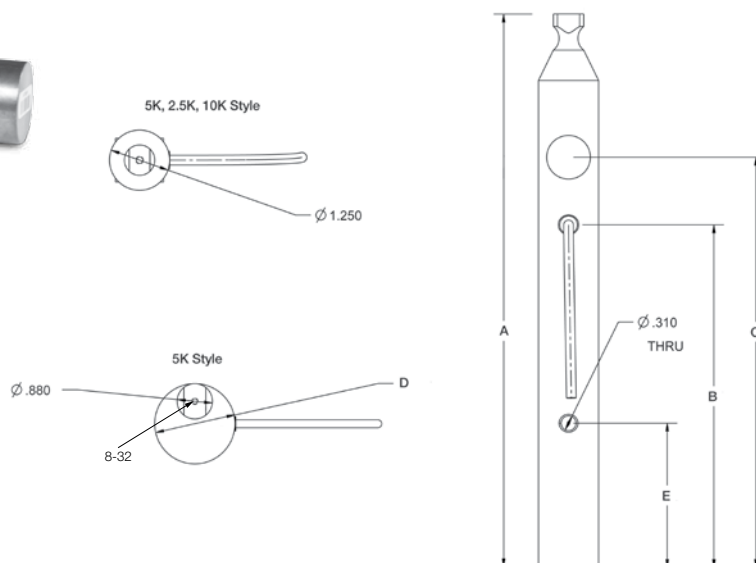

SPECIFICATIONS

Full Scale Output:

2.0mV/V +/- 0.1%

Output Resistance:

350 ohms +/- 3

Input Resistance:

385 ohms +/- 10 ohms

Material/Finish:

Stainless steel

Temperature:

Compensated range
14°F to 104°F/-10°C to 40°C

Safe Overload:

150% full scale

Safe Sideload:

100% full scale

Rated Excitation:

10 VDC

Combined Error:

0.02% full scale

Non-Repeatability:

+/- 0.01% full scale

Insulation Resistance:

5000 megaohms

Cable Color Code:

Green+ Excitation
Black- Excitation
White+ Signal
Red- Signal

Seal Type:

Potted, IP67

Cable Length:

20 ft/6.1 m

Cable Diameter:

.190 polyurethane jacket

Warranty:

Two-year limited warranty

Approvals:


DIMENSIONS

RATED CAPACITY	A	B	C	D	E
lb/inches					
1250 lb	11.0	7.1	8.5	1.25	3.0
2500 lb	11.0	8.5	8.4	1.62	3.0
5000 lb	10.9	5.5	7.4	2.0	3.0
10,000 lb	12.6	5.9	8.0	2.5	3.0
kg/mm					
567.0 kg	292.1	180.9	216.5	31.8	76.2
1134.0 kg	292.1	215.3	212.9	41.1	76.2
2268.0 kg	276.9	138.8	187.5	50.8	76.2
4535.9 kg	320.5	149.6	203.2	63.5	76.2

ORDER INFORMATION

LOAD RATING	PART #	PRICE
1250 lb	566.99 kg	119788
2500 lb	1134.0 kg	119789
5000 lb	2268.0 kg	119790
10,000 lb	4535.9 kg	119791

INTERCHANGEABLE PRODUCTS

MANUFACTURER	MODEL
Avery Weigh Tronix	—
Rice Lake Weighing Systems	75000 SS