

DeckHand Portable Scale



STANDARD FEATURES

- Mild or stainless steel frame, base, and mast
- 500 lb, 1,000 lb, 2,000 lb capacity
- Large rubber wheels simplify movement on uneven floors
- Aluminum load cells (2)
- Standard indicator mount with integral handles for the IQ plus® 355, IQ plus 390-DC, IQ plus 510, IQ plus 590-DC, and IQ 700

SPECIFICATIONS

End Load Capacity:
100% end loading

mV/V Output:
2 mV/V

Cable length:
9 ft 10 in (3 m)

Height:
Weighing platter: 4.5 in H when in weigh mode

Column Height:
59 in

Warranty:

DeckHand weldment five years, load cells two years, all other components one year

Approvals:

NTEP Certified, CC 98-004, Class III, 2500d
Measurement Canada approved, AM-5218

APPROVALS



Measurement
Canada
Approved




PART NUMBER/PRICE

PART #	OVERALL SIZE (W X L X H)	CAPACITY	EST. SHIP WEIGHT	PRICE
Mild Steel				
41293	31 x 41 x 4.5 in	500 lb	336 lb	Consult
41294	31 x 41 x 4.5 in	1,000 lb	356 lb	Consult
41295	31 x 41 x 4.5 in	2,000 lb	373 lb	Consult
Stainless Steel				
41296	31 x 41 x 4.5 in	500 lb	336 lb	Consult
41297	31 x 41 x 4.5 in	1,000 lb	356 lb	Consult
41298	31 x 41 x 4.5 in	2,000 lb	373 lb	Consult

OPTIONS/ACCESSORIES

PART #	DESCRIPTION	EST. SHIP WEIGHT	PRICE
Mild Steel			
43376	500/1,000 lb mild steel ramp		Consult
43378	2,000 lb mild steel ramp		Consult
Stainless Steel			
43377	Ramp assembly, 500/1,000 lb, stainless steel, 25 x 27 in		Consult
43379	Ramp assembly, 2,000 lb, stainless steel, 25 x 27 in		Consult
89576	Clam shell for 1260 load cell, stainless steel		Consult
Consult	Smooth top		Consult
DeckHand Portable Scale Optional Indicator Mounts			
41371	Mounting bracket for 320IS with battery option stainless steel		Consult

* Approximate weight for scale and indicator

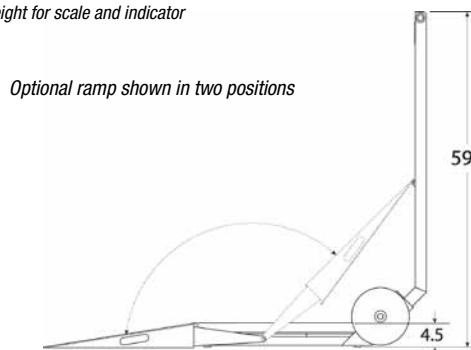

Optional ramp shown in two positions

