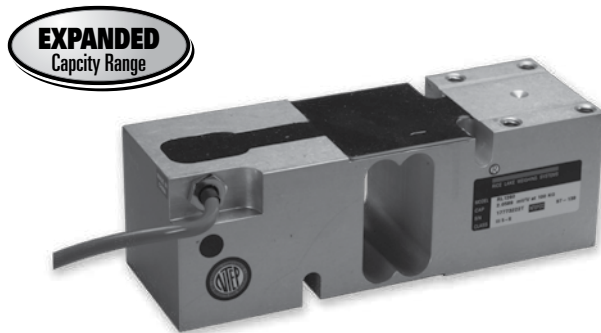
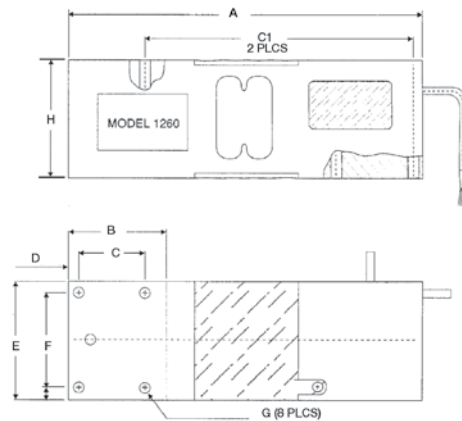


RL1260 Single Point, Aluminum NTEP 1:5000 Class III Single Cell, IP67


Picture is a representation of actual product


SPECIFICATIONS

Full Scale Output:
2.0mV/V

Output Resistance:
350 ohms +/- 3

Input Resistance:
415 ohms +/- 15

Material/Finish:
Anodized aluminum

Temperature:
Compensated range
14°F to 104°F/-10°C to 40°C

Safe Overload:
200% of full scale at center loading point

Rated Excitation:
10V DC (15V maximum)

Total Error:
0.02% Full scale

Insulation Resistance:
5000 megohms

Seal Type:
Environmentally sealed, IP67

Cable Length:
3.1 m/10 ft

Cable Diameter:
.220 polyurethane jacket

Cable Color Code:
Green+ Excitation
Black- Excitation
Blue+ Sense
Brown- Sense
Red+ Signal
White- Signal

Max Platform Size:
24 in x 24 in

Warranty:
Two-year limited warranty

Approvals:


DIMENSIONS

RATED CAPACITY	A	B	C	C1	D	E	F	G	H
lb/inches									
110.2-1400.2	7.40	2.05	1.38	5.59	.22	2.49	1.97	5/16-18 UNC-2B	2.45
kg/mm									
50-635	188	52	35	142	5.5	63.5	50	5/16-18 UNC-2B	62.3

ORDER INFORMATION

LOAD RATING	PART #	PRICE
50 kg (110.2 lb)	41020	Consult
75 kg (165.4 lb)	41021	Consult
100 kg (220.5 lb)	41022	Consult
150 kg (330.7 lb)	158469	Consult
200 kg (440.9 lb)	41023	Consult
250 kg (551.2 lb)	41024	Consult
300 kg (661.4 lb)	41025	Consult
500 kg (1102.3 lb)	41026	Consult
635 kg (1400 lb)	41027	Consult

INTERCHANGEABLE PRODUCTS

MANUFACTURER	MODEL	PAGE #
VPG Tedeo-Huntleigh	1260	340
HBM®	PW16	250
Rice Lake Weighing Systems	RLPWM16	172